

INSTALLATION INSTRUCTION FOR FIXTURE#1691

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.

SUGGESTED INSTALLATION (Fig. 2)

3. Attach the mounting plate [C] to the junction box [A] using the junction box screws [B]. The side of the cross bar marked with "GND" must face out.
5. Position the canopy [D] to the mounting plate [C] and secure with screw [E].
6. Screw the metal tube [G] on to the fixture [I].
7. Determine the desired hanging height and screw metal tube [H] onto the metal tube [G], then secure metal tube [H] to metal loop [F]. Pass the wires carefully through each tube as you assemble.
(Remark: there is one piece 12" L. chain included in the hardware bag. You could add the chain on to increase the fixture height if needed)

CONNECTING THE WIRES (Fig. 2)

8. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the ground wires from the hanger ball and mounting plate to it. Otherwise, connect the ground wire from the hanger ball directly to the mounting plate ground wire and secure with the wire connectors provided. After wires are connected, tuck them carefully into the ceiling junction box.

COMPLETING THE INSTALLATION (Fig. 1)

9. Place glass cup [K] and metal ring [L] on top of socket and secure with metal cup [M].
10. Install the bulb [O] into socket [J] in accordance with fixture's Specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**
11. Place glass shade [P] on top of metal cup [M].

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1


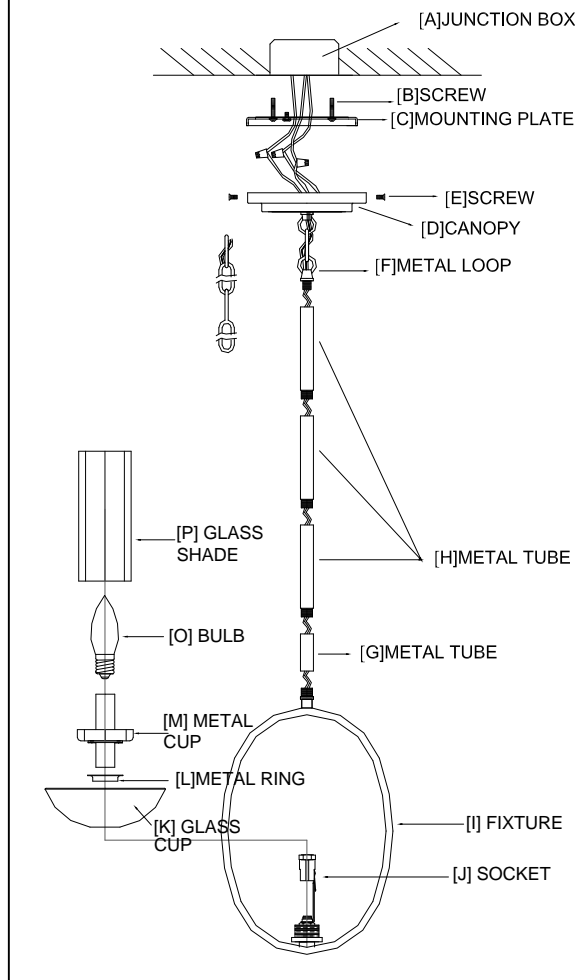


Fig. 2

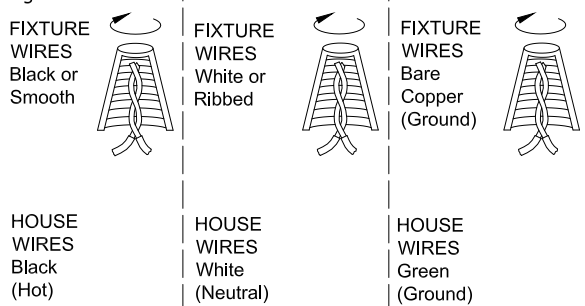

Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.